



TP150/ TP156
15 inch / 15.6 inch
Touch Panel

Product Overview

TP150 and TP156 offer a compact and clear solution for customer-facing interactions in retail and hospitality. Featuring a responsive capacitive touchscreen and Full HD visual clarity, these displays ensure vibrant and smooth transaction experiences. With versatile VESA mounting and flexible connectivity via HDMI (optional) and VGA,


They integrate easily into diverse POS environments—ideal for payment verification, ordering, and self-service applications.

Key Features



15-Inch & 15.6-Inch Full HD Touchscreen

Experience crisp 15-Inch and 15.6-Inch Full HD Touchscreen with 1024*768 and 1920*1080 resolution.

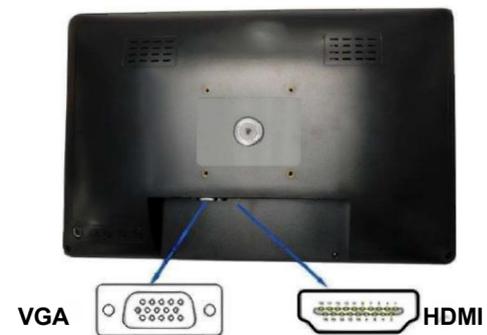

Versatile Connectivity

Easily connect devices via VGA and HDMI ports (Option) for smooth and efficient integration.

Sleek True Flat Design


Features a contemporary seamless surface, suitable for both professional and commercial environments.

VESA Mount Compatible

Compatible with 75x75 mm mounts for versatile placement options, making it ideal for space-saving installation in restaurants and other commercial environments.

Perfect for Various Applications

Ideal for POS systems, retail stores, restaurants, exhibitions, and interactive kiosks. It can be applied to a variety of commercial applications.

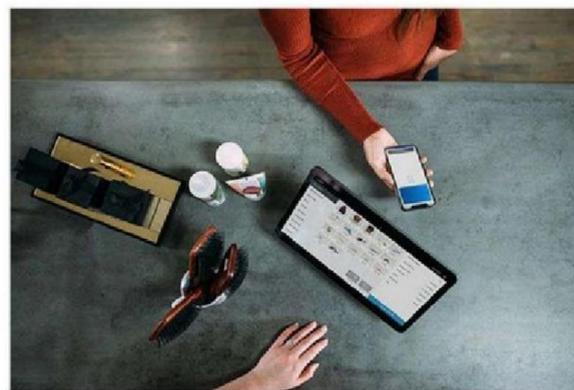

Smart Retail & POS Terminals



Restaurant



store & supermarkets

Features




- 4:3 and 16:9 diagonal LCD flat screen monitor with 1024(H)*768(V) for TP150 and 1920(H)*1080(V) for TP156
- Flat screen monitor with VGA port.(Optional : HDMI)
- Capacitive Touch Screen Monitor with colorful and unambiguous display for point-of-sale customer-facing.
- Supports 75x75 mm mounting for flexible installation.
- Ideal for commercial scenarios in various industries, such as POS systems, smart retail and restaurants.


Specification

MODEL		TP150	TP156	
	LCD Panel Size	15"	15.6"	
	Touch Response Time	30ms	30ms	
	Resolution	1024*768	1920*1080	
	Aspect Ratio	4:3	16:9	
	Contrast Ratio	1000:1(Typ.)	800:1(Typ.)	
	Frame Period	60Hz	60Hz	
	Color Gamut	16.7M,72%NTSC	262K,45%NTSC	
	Brightness	350 cd/m ² (Typ.)	220 cd/m ² (Typ.)	
	View Angle	89/89/89/89(Typ.)(CR≥10)	85/85/85/85(Typ.)(CR≥10)	
	Backlight type	12S4P WLED,50k hours, with LED driver	10S4P WLED,15k hours, with LED driver	
	Video Output	HDMI	*1 (Optional)	*1(Optional)
		VGA	*1	*1
Audio Output	3.5mm TRS Jack	*1	*1	
Testing & Compliance	Operating Temperature	0°C-50°C	0°C-50°C	
	Humidity	20%RH-90%RH	20%RH-90%RH	
Others	Power Adapter	12V 5A	12V 5A	
	VESA Mount(mm)	75*75	75*75	
	Housing Material	Plastics	Plastics	

Dimensions

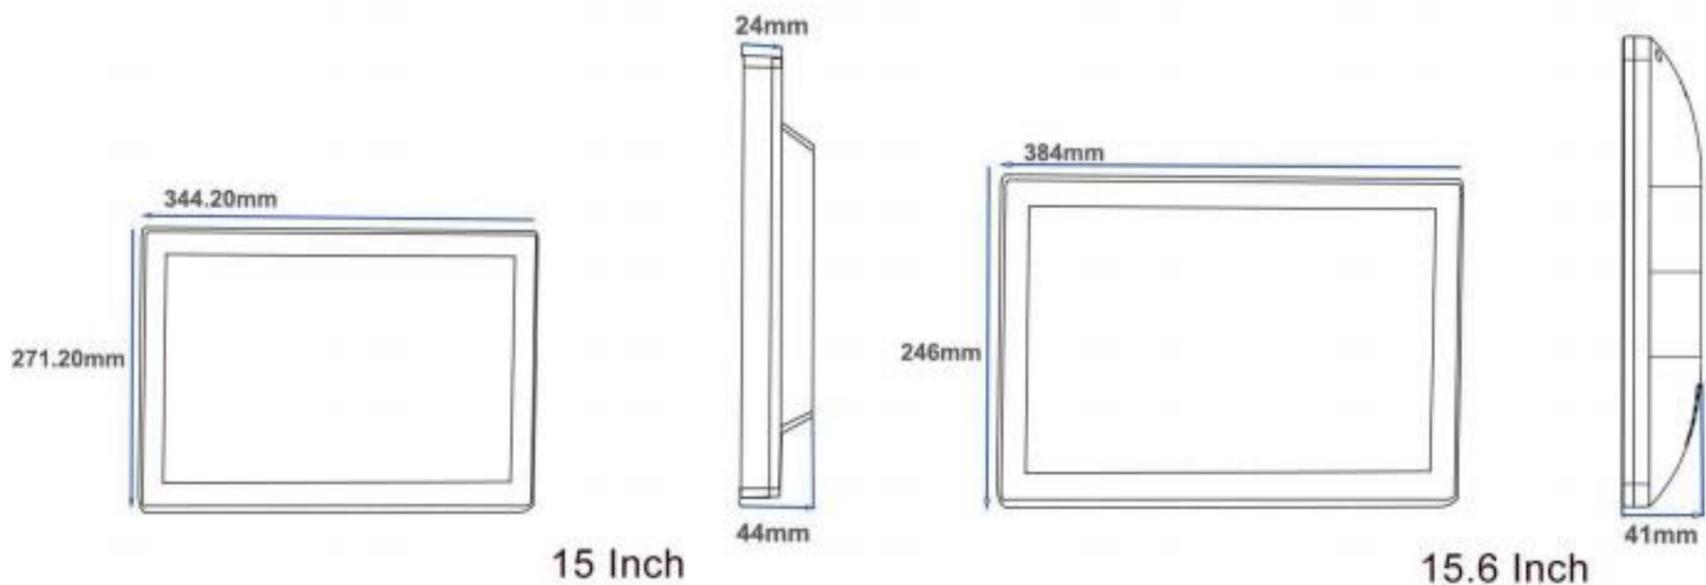

I/O Ports

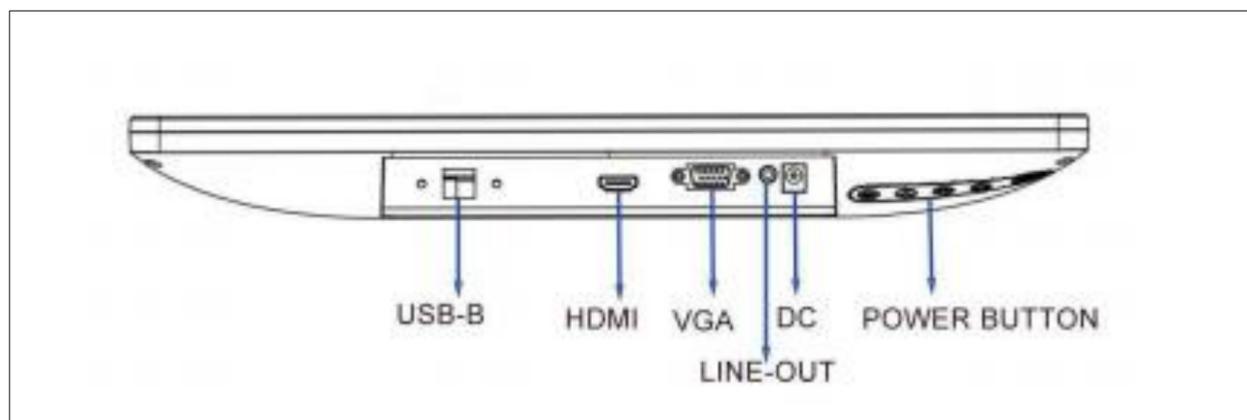

BIRCH TECHNOLOGY INC
 7F-13, No# 79, Hsin Tai 5th Rd., Sec 1, Hsichih, New Taipei City, Taiwan
 Tel:886-2-2698-9596 Fax:886-2-2698-95
[E-mail:sales@mail.birch.com.tw](mailto:sales@mail.birch.com.tw)
<http://www.e-birch.com>